



Massenträgheitsmoment / Mass moment of inertia
 $J_{ges.} = 0.0351837 \text{ kgm}^2$

Drehmoment / Torque
 Zahnkranz / spider 92 Sh A T-PUR
 (Zahnkranz / spider 92 Sh A)
 $T_{KN} = 625 \text{ Nm}$
 $T_{Kmax} = 1250 \text{ Nm}$

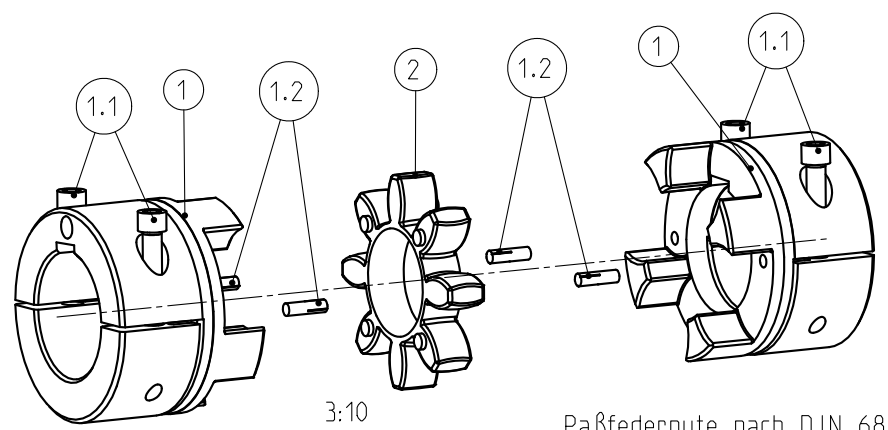

Schraubenanzugsmoment Teil 1.1 M12x45 DIN 912-12.9, $T_A = 120 \text{ Nm}$
 screw tightening torque part 1.1 M12x45 DIN 912-12.9, $T_A = 120 \text{ Nm}$

Oberflächengüte nach DIN ISO 1302 Reihe 2 Surface quality acc. to DIN ISO 1302 line 2		Schutzvermerk ISO 16016 beachten Note protection mark acc. to ISO 16016			
Allgemeintoleranzen nach DIN ISO 2768 - mH General tolerances acc. to DIN ISO 2768-		Masstab Scale	11:20	Format DIN Size	A3
ROTEX 65 A-H			 KTR-Kupplungstechnik GmbH D-48407 Rheine		
gezeichnet drawn	Werkstoff Material	Teilnummer Part number	Kz	Lfd.-Nr. Current number	Index Change
Datum Date	09.01.12 DIN		M	424753	2
Name Name	SCHP	Gewicht Weight	11.363		