

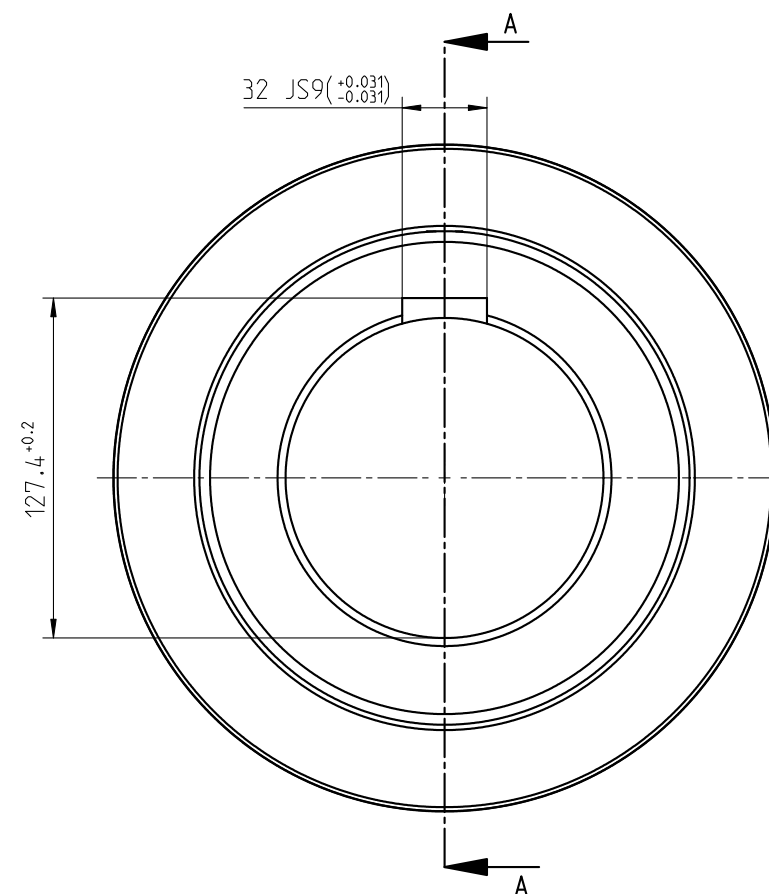


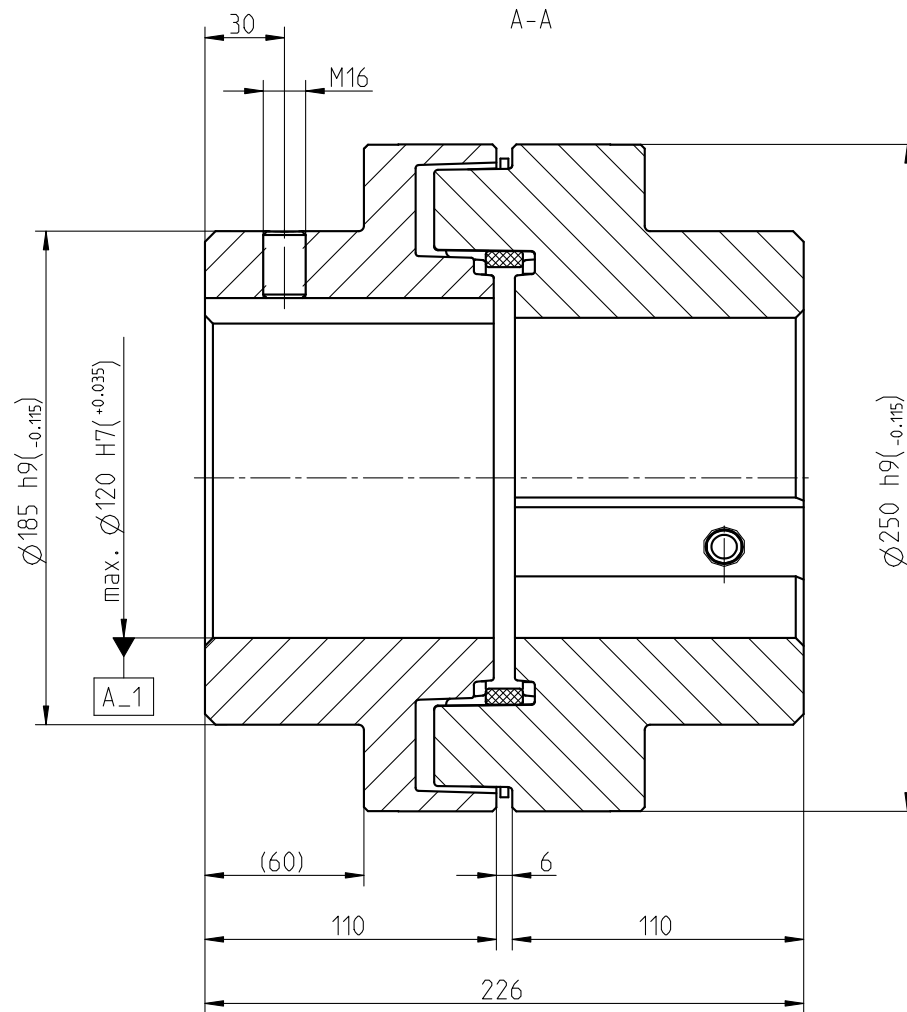

POLY-NORM	Gewicht Weight [kg]	Massenträgheitsmoment Mass moment of inertia [kgm ²]
Nabe Hub	17.211	0.141956
Elastomerring Elastomer ring	0.610	0.006058
Komplette Kupplung Complete coupling	35.100	0.290479

Drehmoment / Torque
Elastomerring / elastomer ring
NBR 78 Shore A
 $T_{KN} = 3900 \text{ Nm}$
 $T_{Kmax} = 7800 \text{ Nm}$

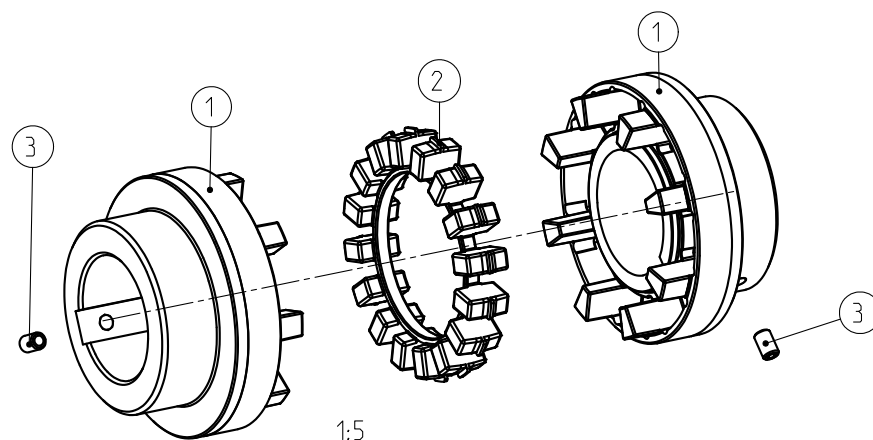

Oberflächengüte nach DIN ISO 1302 Reihe 2 Surface quality acc. to DIN ISO 1302 line 2				Schutzvermerk ISO 16016 beachten Note protection mark acc. to ISO 16016			
Allgemeintoleranzen nach DIN ISO 2768 - General tolerances acc. to DIN ISO 2768-				Masstab Scale	1:2	Format DIN Size	A3
POLY-NORM 110 $\varnothing 120$ $\varnothing 120$ Bauart AR				 KTR-Kupplungstechnik GmbH D-48407 Rheine			
	gezeichnet drawn	Werkstoff Material		Teilnummer Part number	Kz	Lfd.-Nr. Current number	Index Change
Datum	10.10.11	DIN			M	427073	2
Name	LUH	Gewicht Weight	35.100				