



Drehmoment / Torque
 Elastomerring / elastomer ring
 NBR 78 Shore A
 $T_{KN} = 550 \text{ Nm}$
 $T_{Kmax} = 1100 \text{ Nm}$

| POLY-NORM | Gewicht [kg] Weight [kg] | Massenträgheitsmoment [kgm ²] Mass moment of inertia [kgm ²] |
|---|-----------------------------|---|
| Kupplungshälfte coupling half | 6.747 | 0.020205 |
| Elastomerring Elastomer ring | 0.112 | 0.000335 |
| Komplette Kupplung Complete coupling | 13.607 | 0.040746 |

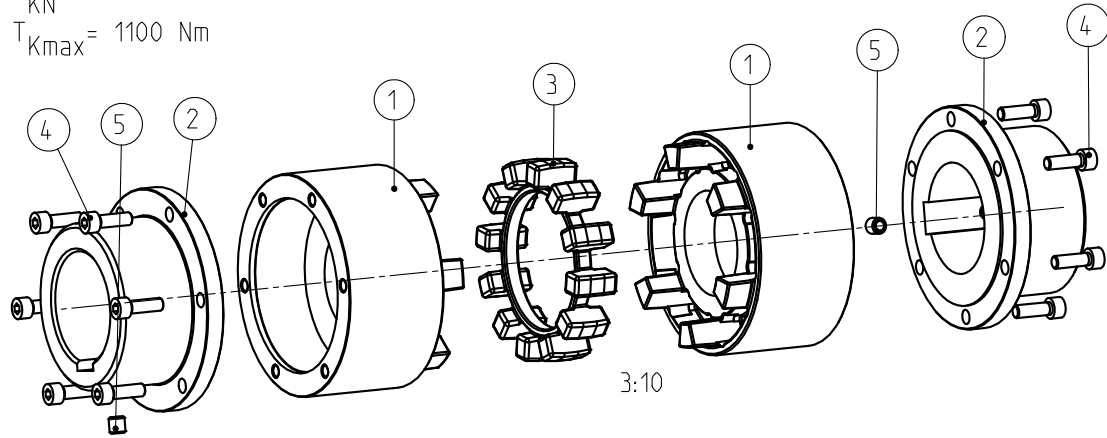

Schraubenanzugsmoment Teil 4 M8x25 DIN 912-12.9, $T_A = 35 \text{ Nm}$
 screw tightening torque part 4 M8x25 DIN 912-12.9, $T_A = 35 \text{ Nm}$

| | | | | |
|--|-----------------------|--|--|----------------------------|
| Oberflächengüte nach DIN ISO 1302 Reihe 2 Surface quality acc. to DIN ISO 1302 line 2 | | Schutzvermerk ISO 16016 beachten Note protection mark acc. to ISO 16016 | | |
| Allgemeintoleranzen nach DIN ISO 2768 - mH General tolerances acc. to DIN ISO 2768- | | Masstab Scale | 13:20 | Format DIN Size |
| | | | | A3 |
| POLY-NORM 65 (f. L=140) Bauart AZR | | |  KTR-Kupplungstechnik GmbH D-48407 Rheine | |
| gezeichnet drawn | Werkstoff Material | Teilnummer Part number | Kz | Lfd.-Nr. Current number |
| Datum 14.07.03 | DIN | | M | 399660 |
| Name HUE | Gewicht Weight | 13.607 | | Index Change 2 |