
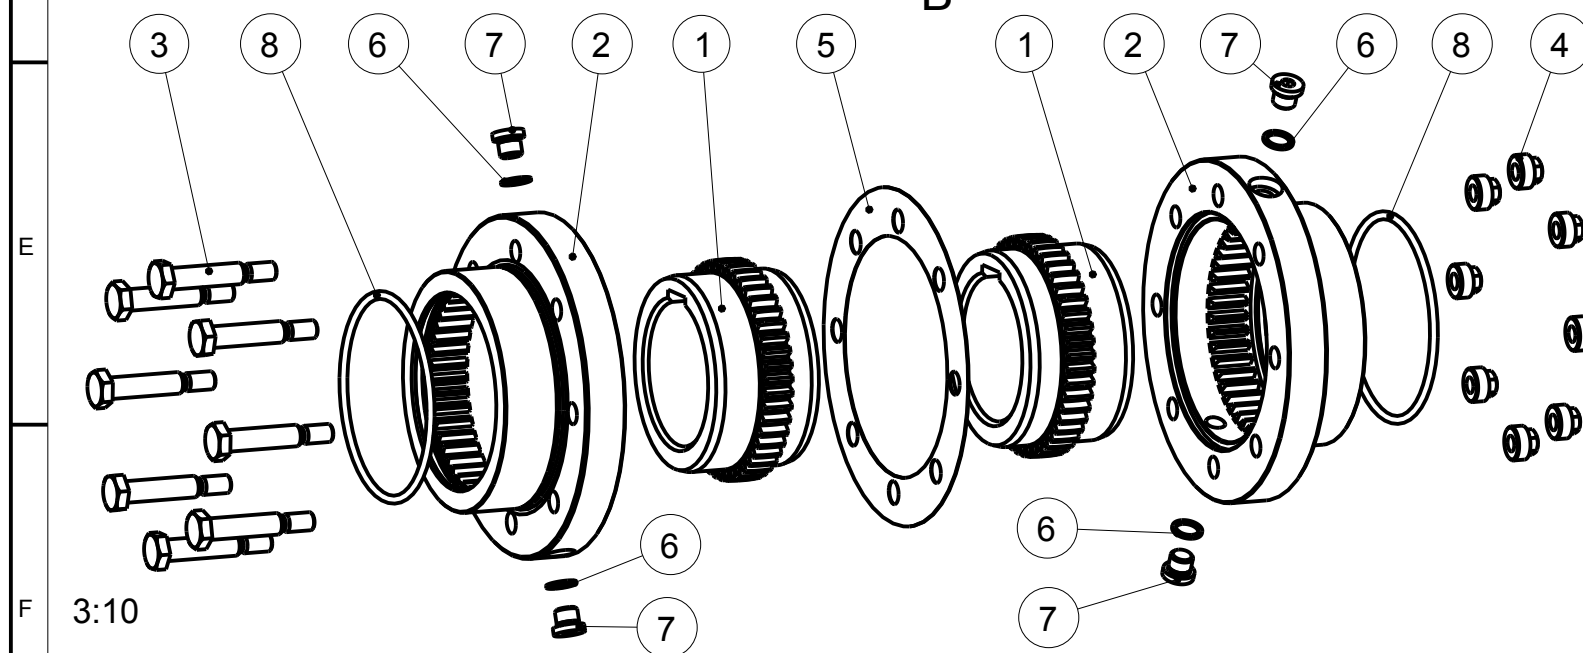
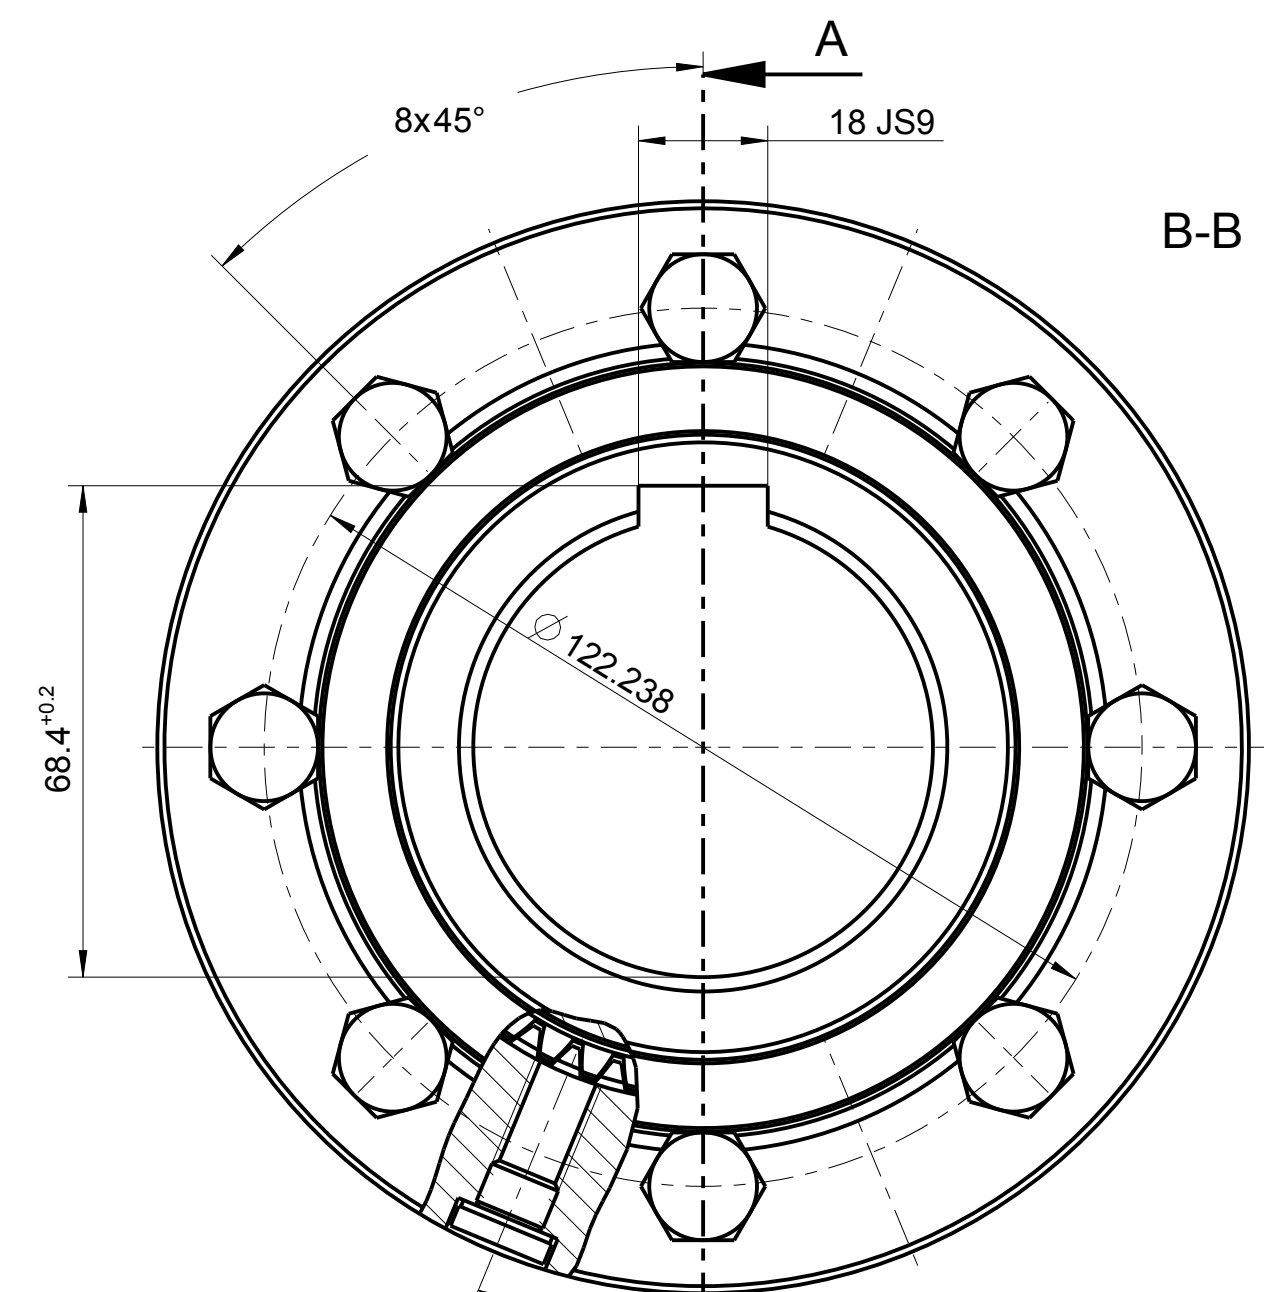


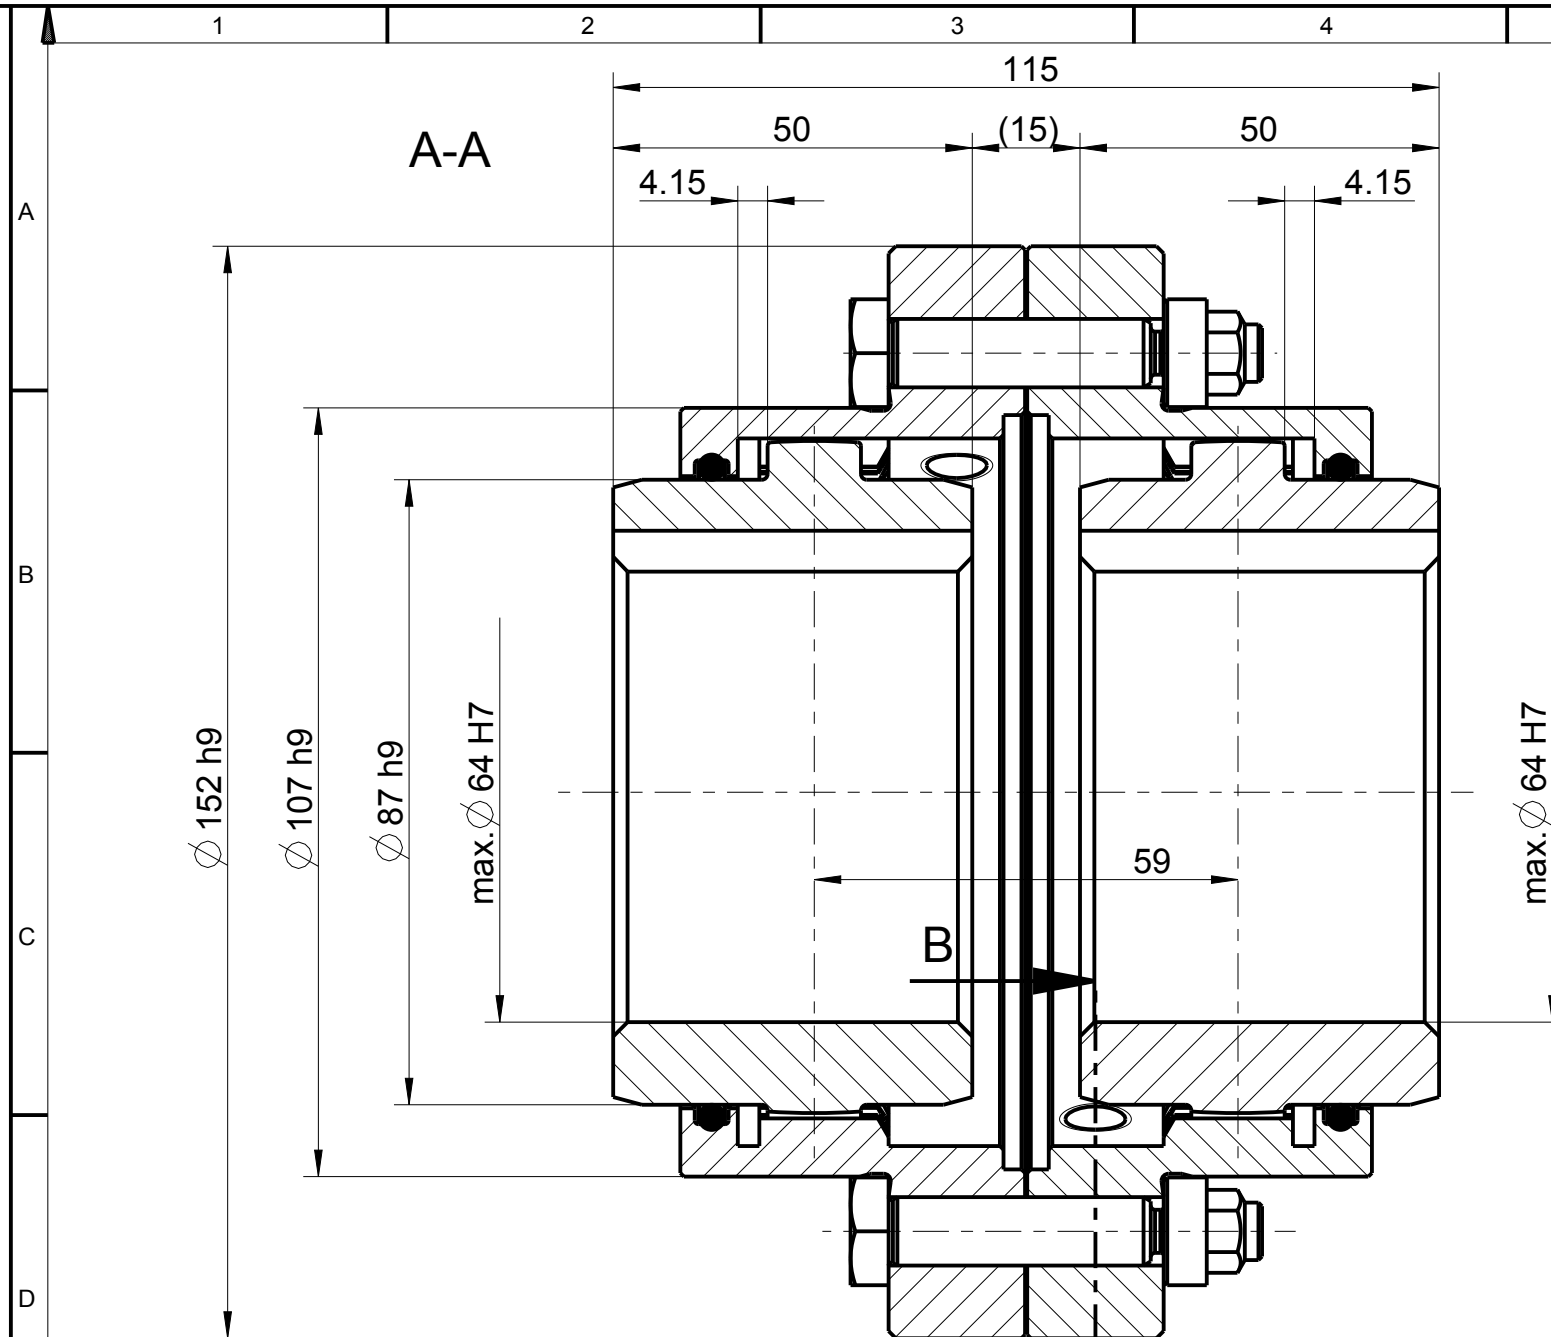

Pos.8: O-Ring: 87x3.5

Pos.7: Schraube / screw DIN 908: M10x1

Pos.6: Scheibe / disc DIN 7603: A10x13.5

Schraubenanzugsmoment (Pos.3)  $T_A = 36 \text{ Nm}$

screw tightening torque (Pos.3)  $T_A = 36 \text{ Nm}$

ACHTUNG / ATTENTION

Schrauben bei Auslieferung handfest angezogen.

Screws are not tightened at delivery.

Drehmoment / torque

$T_{KN} = 2000 \text{ Nm}$

$T_{Kmax.} = 4000 \text{ Nm}$

Oberflächenguete nach DIN ISO 1302 Reihe 2  
Surface quality acc. to DIN ISO 1302 line 2

Schutzvermerk ISO 16016 beachten  
Note protection mark acc. to ISO 16016

Allgemeintoleranzen nach DIN ISO 2768 - mH  
General tolerances acc. to DIN ISO 2768 - mH

Masstab  
Scale

19:20

Format DIN  
Size

A3

GEARex 15 Ø64 Ø64  
Bauart FB



KTR-Kupplungstechnik  
GmbH  
D-48407 Rheine

|       | gezeichnet<br>drawn | Werkstoff<br>Material | Teilnummer<br>Part number | Kz | Lfd.-Nr.<br>Current number | Index<br>Change |
|-------|---------------------|-----------------------|---------------------------|----|----------------------------|-----------------|
| Datum | 30.08.11            | DIN                   |                           |    |                            |                 |
| Name  | SCHP                | Gewicht<br>Weight     | 6.375                     | M  | 543112                     | 0               |

Für Montage, Betrieb & Wartung, Betriebs-/ Montageanleitung KTR-N 40310 beachten.  
For assembly, operation & maintenance, observe operating-/ assembly instructions KTR-N 40310.