



Drehmoment / Torque
 Balg / bellow
 $T_{KN} = 1 \text{ Nm}$

Massentraegheitsmoment (J_{ges}) der Kupplung (mit max. und min. Bohrung) 0.189722 kgmm^2
 mass moment of inertia (J_{ges}) of the kuppling (with max. and min. bore) 0.189722 kgmm^2

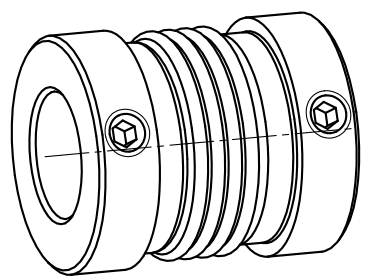

3:1

Oberflaechenguete nach DIN ISO 1302 Reihe 2 Surface quality acc. to DIN ISO 1302 line 2		Schutzvermerk ISO 16016 beachten Note protection mark acc. to ISO 16016			
Allgemeintoleranzen nach DIN ISO 2768 - mH General tolerances acc. to DIN ISO 2768 - mH		Masstab Scale	5:1	Format DIN Size	A3
TOOLFLEX 7 Bauart S			 KTR-Kupplungstechnik GmbH D-48407 Rheine		
gezeichnet drawn	Werkstoff Material	Teilnummer Part number	Kz	Lfd.-Nr. Current number	Index Change
Datum 16.10.06	DIN		M	449439	0
Name HF	Gewicht Weight	0.006			