


Drehmoment / Torque  
 Zahnkranz / spider 95 Sh A-GS

$T_{KN} = 940 \text{ Nm}$   
 $T_{Kmax} = 1880 \text{ Nm}$


Massentraegheitsmoment / Mass moment of inertia  
 (bei / at  $L_R=1000\text{mm}$ )

$J_{ges} = 0.059719026 \text{ kgm}^2$

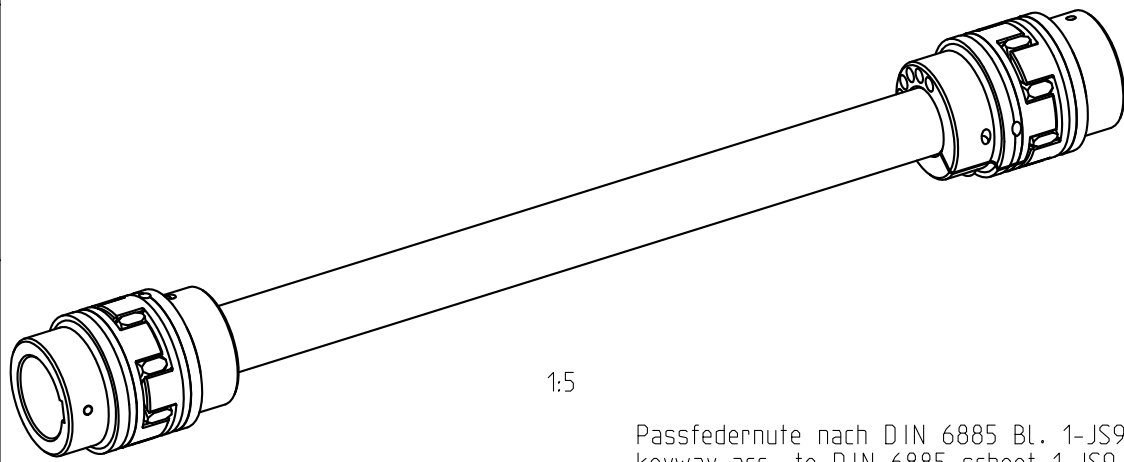

1:5

Passfedernute nach DIN 6885 Bl. 1-JS9  
 keyway acc. to DIN 6885 sheet 1-JS9

|  |                       |  |   |                            |                 |
|--|-----------------------|--|---|----------------------------|-----------------|
| Oberflaechenguete nach DIN ISO 1302 Reihe 2<br>Surface quality acc. to DIN ISO 1302 line 2 |                       | Schutzvermerk ISO 16016 beachten<br>Note protection mark acc. to ISO 16016 |   |                            |                 |
| Allgemeintoleranzen nach DIN ISO 2768 - mH<br>General tolerances acc. to DIN ISO 2768-     |                       | Masstab<br>Scale   | 7:20  | Format DIN<br>Size         | A3              |
| <b>ROTEX 65<br/>ZR</b>   |                       |  |  <b>KTR-Kupplungstechnik<br/>GmbH<br/>D-48407 Rheine</b> |                            |                 |
| gezeichnet<br>drawn  | Werkstoff<br>Material | Teilnummer<br>Part number  | Kz  | Lfd.-Nr.<br>Current number | Index<br>Change |
| Datum<br>18.10.07  | DIN                   |  | M   | 465889                     | 0               |
| Name<br>EG   | Gewicht<br>Weight     | 26.769   |   |                            |                 |